


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

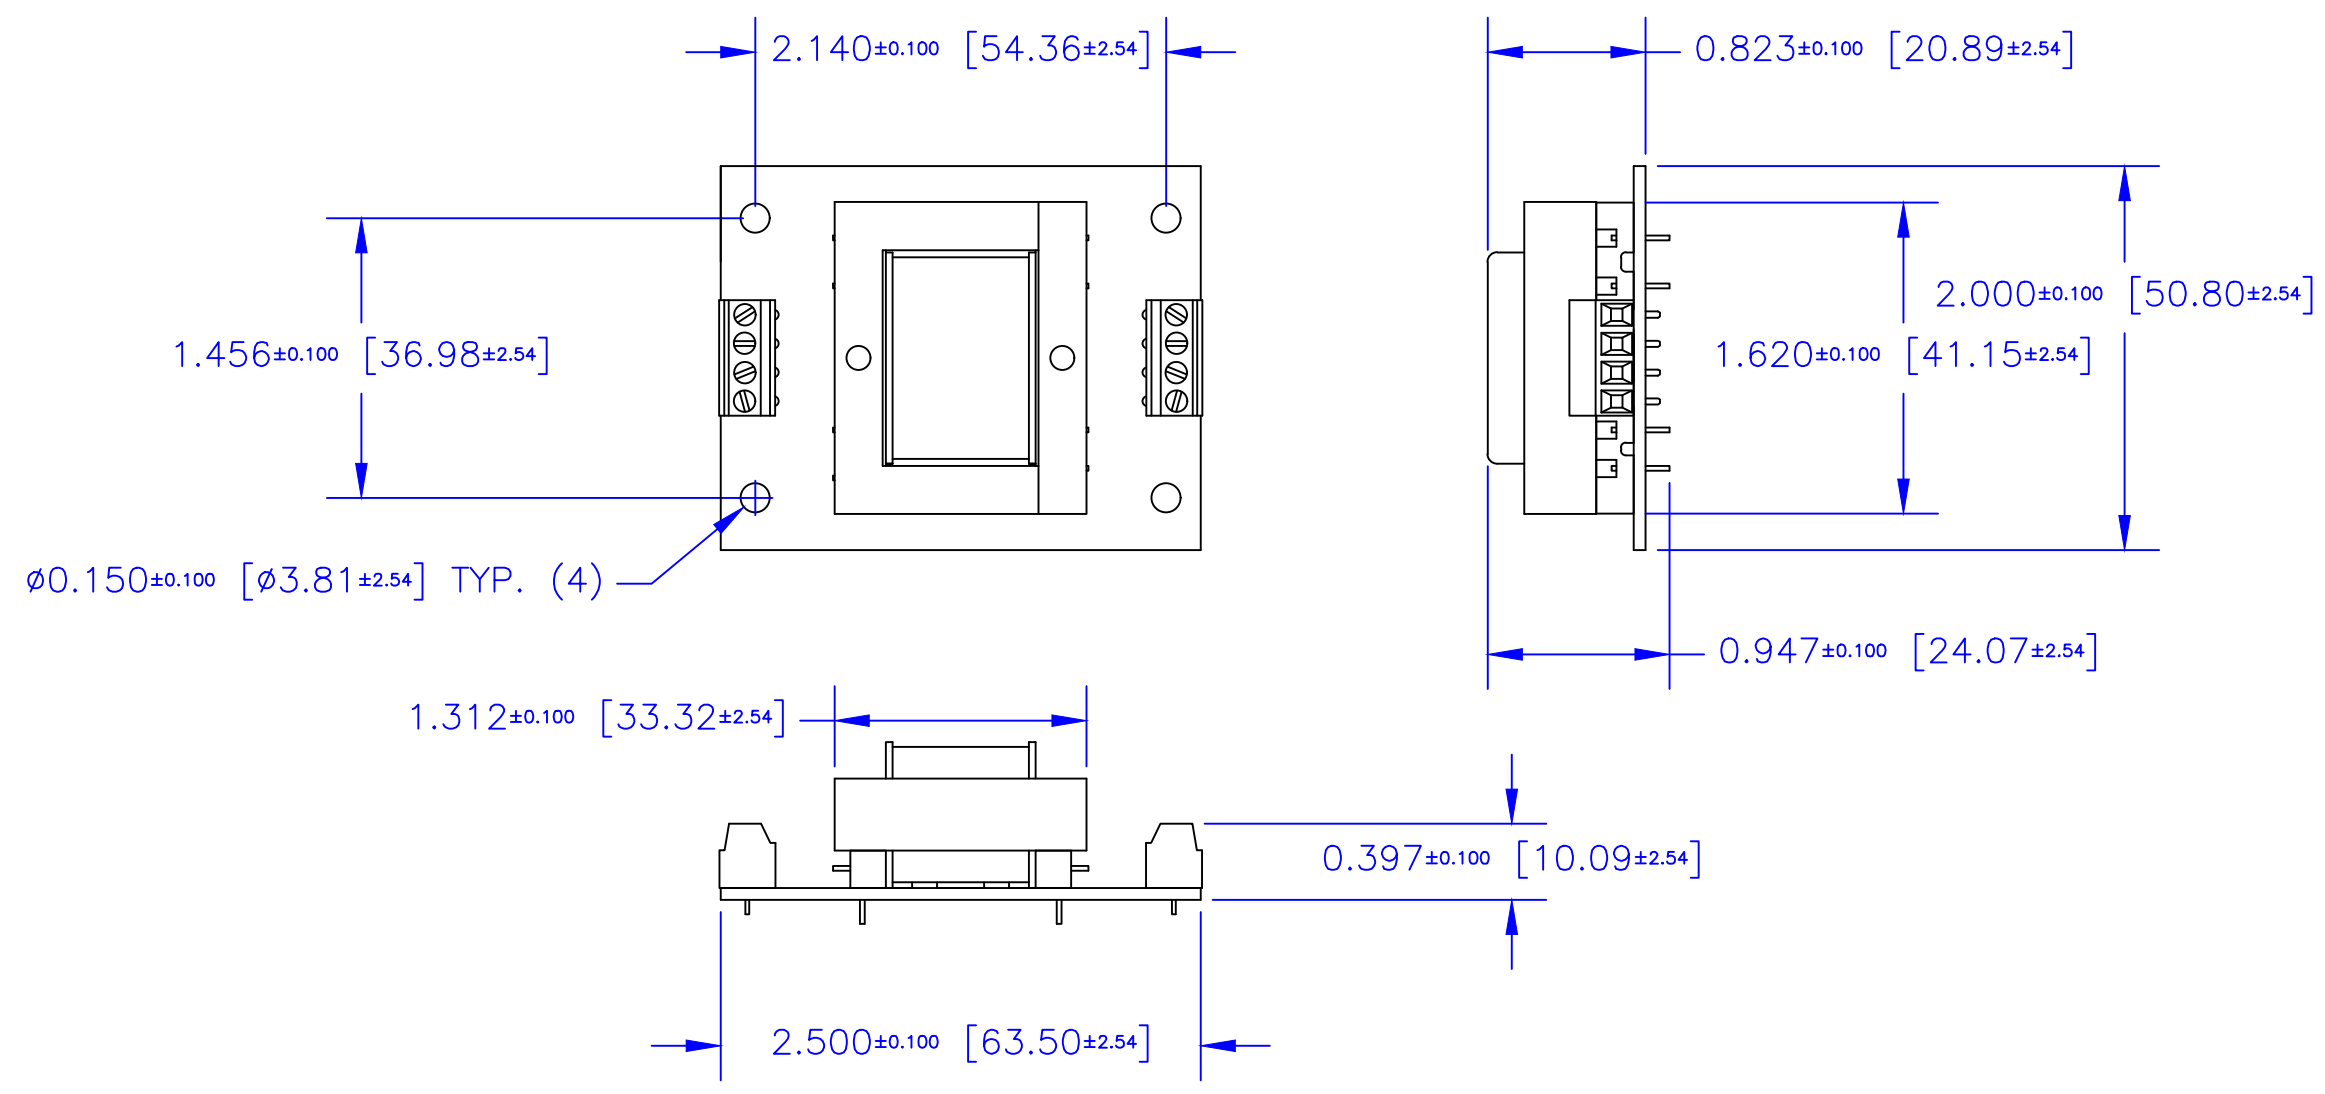

- **NOTES: UNLESS OTHERWISE SPECIFIED!**
1. All material is UL listed.
 2. All material are to be RoHS compliant.
 3. Bobbin: Nylon 6/6 30% glass filled, Class B, Flammability 94HB UL E184262.
 4. Magnet Wire: Class B, UL E32638, Gauge depending on the transformer design specifications requirement.
 7. Finish Tape: Polyester film tape, Class 130°, dielectric strength 5000 volts, UL E17385, guide OANZ2.
 8. Core Material: Depending on the transformer design specifications requirement.
 6. Termination: Eurostyle connectors that will accept 30 AWG to 18 AWG stranded or solid wire.
 7. Mounting: surface mounted with four screws.
 8. Finish: Styrenated alkyd electrical varnish, air cured, UL E63933.

DIMENSIONS ARE IN INCHES [MILLIMETERS]. X.XXX = ±0.010 X.XX = ±0.03 ANGLES = ±0.05 UNLESS OTHERWISE SPECIFIED		EDCOR Electronics 7130 National Parks Highway, Carlsbad, NM 88220 Voice: (575) 887-6790 www.edcorusa.com		
DRAWING BY Brian Weston		Date 7/2004		
CHECKED BY Brian Weston		Date 7/2004		
APPROVED BY Larry Weston		Date 7/2004		
SIZE C		FSCM NO. 15000-EI050-037-T		DWG NO. 15000-EI050-037-T
SCALE: 1:1		©2015 EDCOR Electronics		SHEET: 1 of 1