


XPWR Series

CLASSIC POWER TRANSFORMERS

XPWR067-100/120

Power transformer for a 100V and 120V, 50/60Hz. line to 640V (320-0-320) at 150mA center tapped, 6.3V at 3A, 5V at 3A and two 2.5V at 3A.

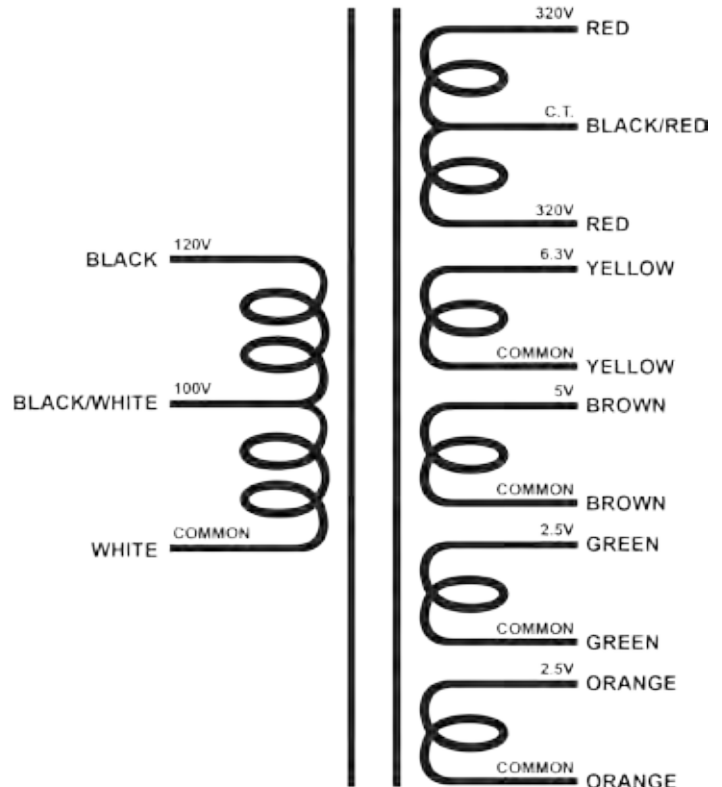

Design

Mathematically designed to produce the specified voltage(s) when loaded.

Primary (Input)

Designed for 100 or 120V, 50/60Hz.

Secondary (Output)

This transformer has multiple voltage windings, 640V (320-0-320) at 150mA center tapped, 6.3V at 3A, 5V at 3A and two 2.5V at 3A.

Magnet Wire

All units are wound with the finest virgin copper magnet wire. All windings use heavy insulated wire to provide excellent manufacturing yield, lower customer cost and superior life.

The Core

EDCOR uses the finest M6 line grain oriented steel cores. Each unit is hand stacked to assure at least 92% stack.

The Bobbins

EDCOR's royal blue bobbin with black finishing tape.

Termination

The terminations are UL1015, 18 ga. lead wire.

Mounting

This unit comes with steel end bells for mounting with the use of four screws. The end bells are powder coated Gentian Blue (RAL 5010) to add to your tube display and overall appearance.

Specifications

Primary (input) Voltage	100Vrms & 120Vrms, 50/60Hz.
Secondary (output) Voltage	640V(320-0-320)@150mA, 6.3V@3A, 5V@3A, 2.5V@3A & 2.5V@3A
Bobbin Material	Glass Filled Nylon 6/6
Flamability Rating	Class B 130°C
Core Material	M6 29 ga. line grain oriented steel
Termination	UL1015, 18 ga. lead wire
Mounting	Powder coated steel end bells
Weight	6 lbs.
Dimensional Drawing	15000-EI125-150-0X
Compliance	RoHS, REACH



edcorusa.com