



LVP4-2.25-120

Type: Low Voltage Power Transformer

Primary: 120V, 60Hz.

Secondary: 4V(2-0-2)@2.25A

Schematic



Image

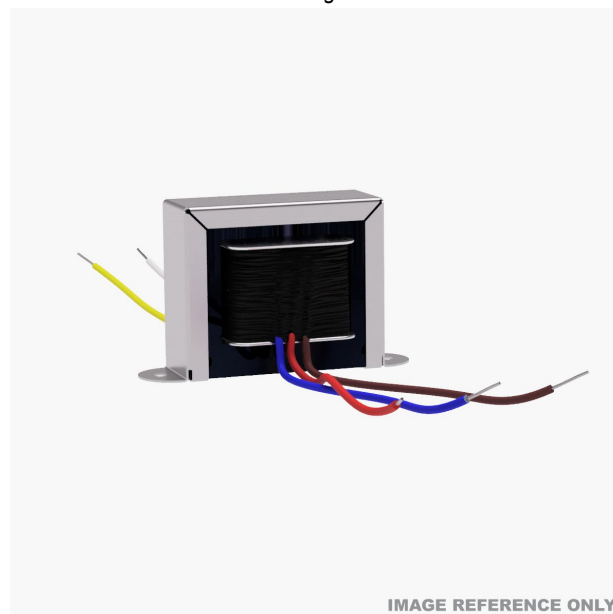


IMAGE REFERENCE ONLY

Specifications:

Total Volt Amperes: 9VA

Primary: 120V, 60Hz.

Primary Current: 0.079A

Primary DCR: 24.742Ω

Primary inductance: 8.488H

Secondary Voltages: 4V

Unloaded Voltages: 4.267V

Secondary Currents: 2.25A

Secondary DCR: 0.036Ω

Winding Config: Layer Wound

Core Stack: Interleave (1x1)

Dielectric Strength: 2500Vrms

HIPOT Pri.-Sec.: 2000Vrms

120V Temp. Rise: 55.37°F (12.98°C)

Temperature Range: -40°F (-40°C) to 221°F (105°C)

Leakage Inductance: 0.0052H

Efficiency: 90%

Regulation: 3.60%

Compliance: REACH & REACH & CMRT

Country of Origin: United States

Harmonized System Code: 8504.31.2000

Physical

Core Size: EI075 x 1in.

Dimensional Drawing: 15000-EI075-100-01H

Weight: 1.2 lbs.

Bobbin

Material: Nylon 6/6 GF-30

Flammability Rating: Class-HB

Magnet Wire

Material: Nylon coated unrecycled solid copper wire.

Core Material

Material: M6 29 ga. grain oriented lamination steel.

Coil Finishing Wrapper

Material: Polyester film/Non-woven tape.

Secondary Insulation

Material: Clear air dry polyester electrical varnish.

Hardware

Mounting: Channel

Orientation: Horizontal

Terminations

Material: 15 in. (38cm) UL1015, 18 ga. lead wire.

EDCOR Electronics Corporation

7130 National Parks Highway - Carlsbad, NM 88220 - United State