




XPWR046-110/120

Type: Tube Power Transformer

Primary: 120V, 60Hz.

Secondary: 320V@375mA, 100V@50mA, 18V(9-0-9)@2.5A, 6.3V(3.15-0-3.15)@1A, & 5V@4A

Schematic

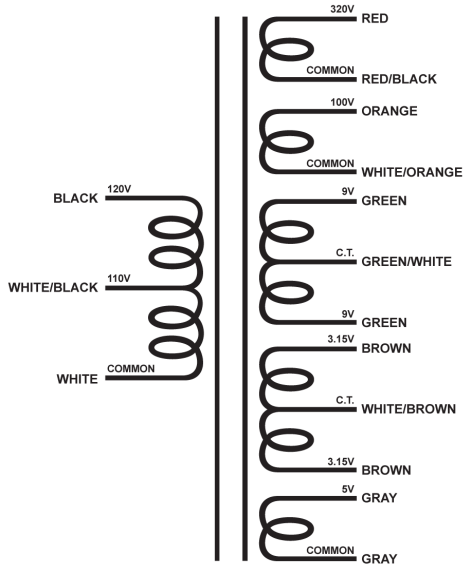

Image

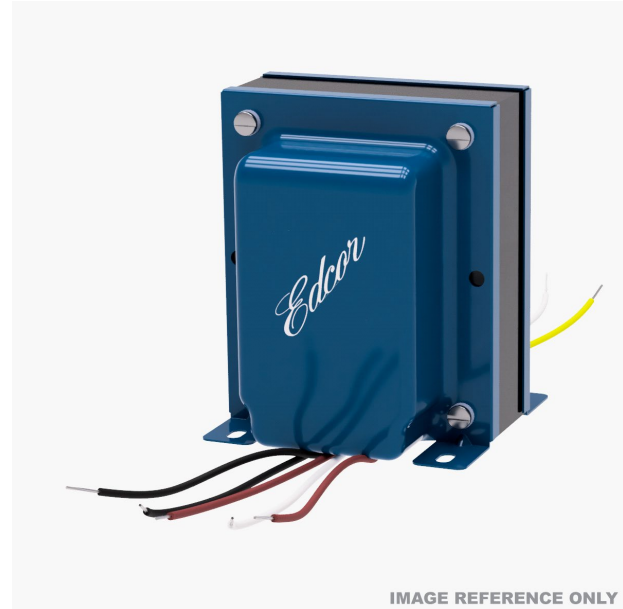


IMAGE REFERENCE ONLY

Specifications:

Total Volt Amperes: 196.3VA

Primary: 120V, 60Hz.

Primary Current: 1.759A, 1.918A

Primary DCR: 1.222Ω, 1.123Ω

Primary inductance: 0.389H, 0.327H

Secondary Voltages: 320V, 100V, 18V, 6.3V, 5V

Unloaded Voltages: 345.854V, 108.293V, 19.512V, 6.829V, 5.366V

Secondary Currents: 0.375A, 0.05A, 2.5A, 1A, 4A

Secondary DCR: 25.809Ω, 16.549Ω, 0.204Ω, 0.153Ω, 0.036Ω

Winding Config: Layer Wound

Core Stack: Interleave (1x1)

Dielectric Strength: 2500Vrms

HIPOT Pri.-Sec.: 2000Vrms

120V Temp. Rise: 77.61°F (25.34°C)

110V Temp. Rise: 78.87°F (26.04°C)

Temperature Range: REACH & REACH & CMRT

Leakage Inductance: 0.002H

Efficiency: 94%

Regulation: 13.23%

Compliance: REACH & REACH & CMRT

Country of Origin: United States

Harmonized System Code: 8504.31.2000

Physical

Core Size: EI150 x 1.5in.

Dimensional Drawing: 15000-EI150-150-0XV

Weight: 7.1 lbs.

Bobbin

Material: Nylon 6/6 GF-30

Flammability Rating: Class-HB

Magnet Wire

Material: Nylon coated unrecycled solid copper wire.

Core Material

Material: M6 29 ga. grain oriented lamination steel.

Coil Finishing Wrapper

Material: Polyester film/Non-woven tape.

Secondary Insulation

Material: Clear air dry polyester electrical varnish.

Hardware

Mounting: End Bells

Orientation: Vertical

Terminations

Material: 15 in. (38cm) UL1015, 18 ga. lead wire.

EDCOR Electronics Corporation

7130 National Parks Highway - Carlsbad, NM 88220 - United State