



XS Series

SPECIALTY MATCHER

XS150-1.8K

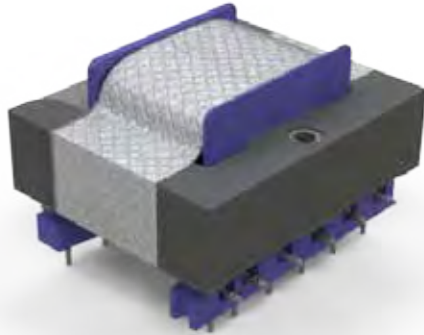

1/2W dual 150 Ohms to dual 1.8K Ohms (1+1:3.46+3.49) line level matching transformer.

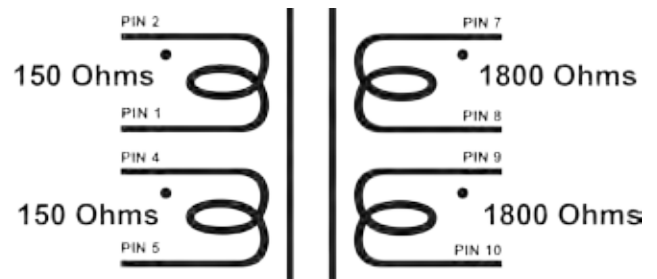

Design

Mathematically designed to produce a turns ratio of 1+1:3.49+3.46 for line level signals.

Dual Primary (Input)

Designed for a unbalanced 150 Ohms line level signal.

Dual Secondary (Output)

Designed for a unbalanced 1.8K Ohms line level signal.

Magnet Wire

All units are wound with the finest virgin copper magnet wire. All windings use heavy insulated wire to provide excellent manufacturing yield, lower customer cost and superior life.

The Core

EDCOR uses the finest M6 line grain oriented steel cores. Each unit is hand stacked to assure at least 92% stack.

The Bobbins

EDCOR's royal blue bobbin with black finishing tape.

Copper Shielding

Outer copper shield around winding and core to help eliminate outside interference.

Termination/Mounting

This unit is designed for printed circuit boards. For footprint and suggested hole and pad size please see the dimensional drawing.

Specifications

Input Maximum Voltage	0.5W
Turns Ratio	1+1:3.49+3.49
Primary (input) Impedance	Dual 150 Ohms
Secondary (output) Impedance	Dual 1.8K Ohms
Frequency Response	10~50K Hz., <1dBu
THD+Noise	<0.01% @ 1K Hz.
Copper Shielding	Yes
Bobbin Material	Glass Filled Nylon 6/6
Flamability Rating	Class B 130°C
Core Material	M6 29 ga. line grain oriented steel
Termination	12 pin PCB
Mounting	Printed circuit board mounted (PCB)
Weight	0.4 lbs.
Dimensional Drawing	15000-El625-050-P12
Compliance	RoHS, REACH



edcorusa.com