





4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

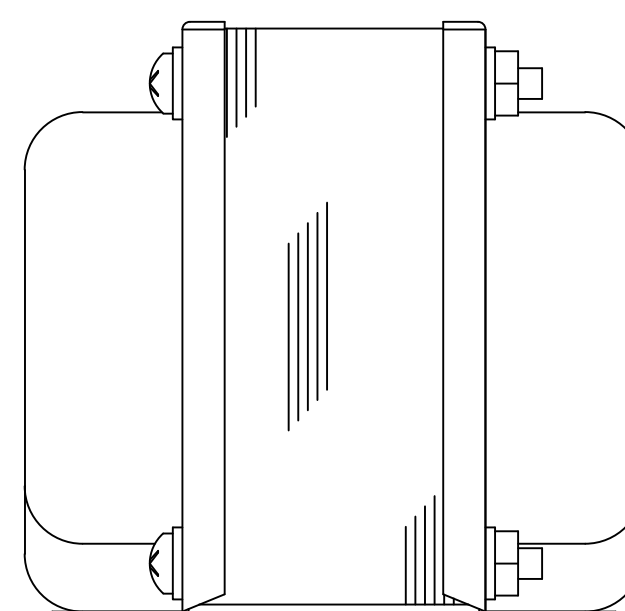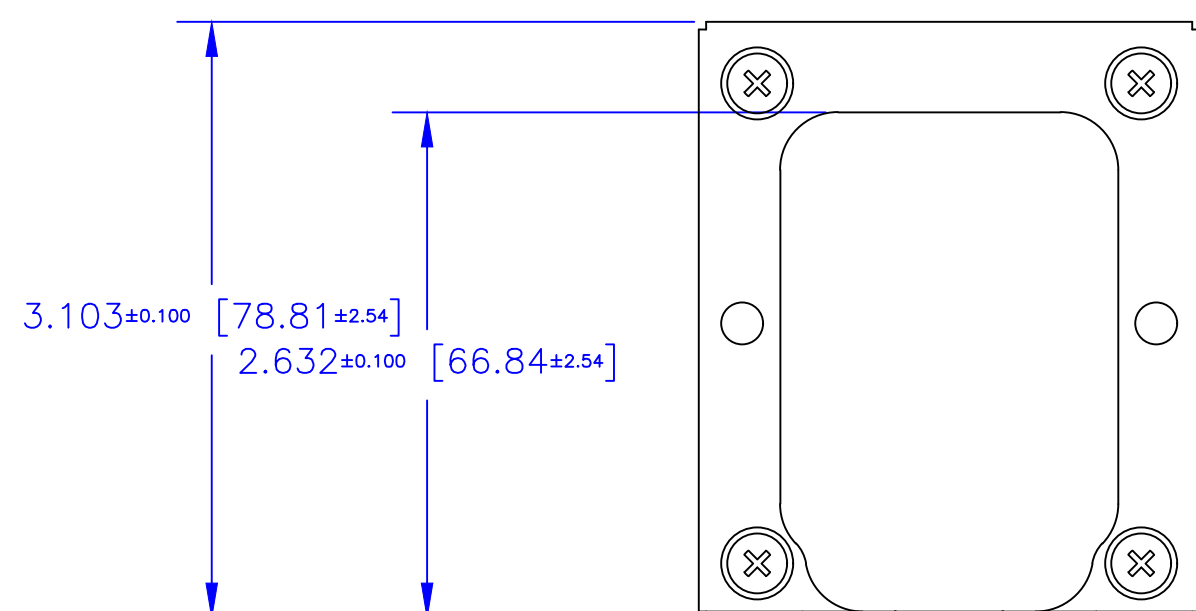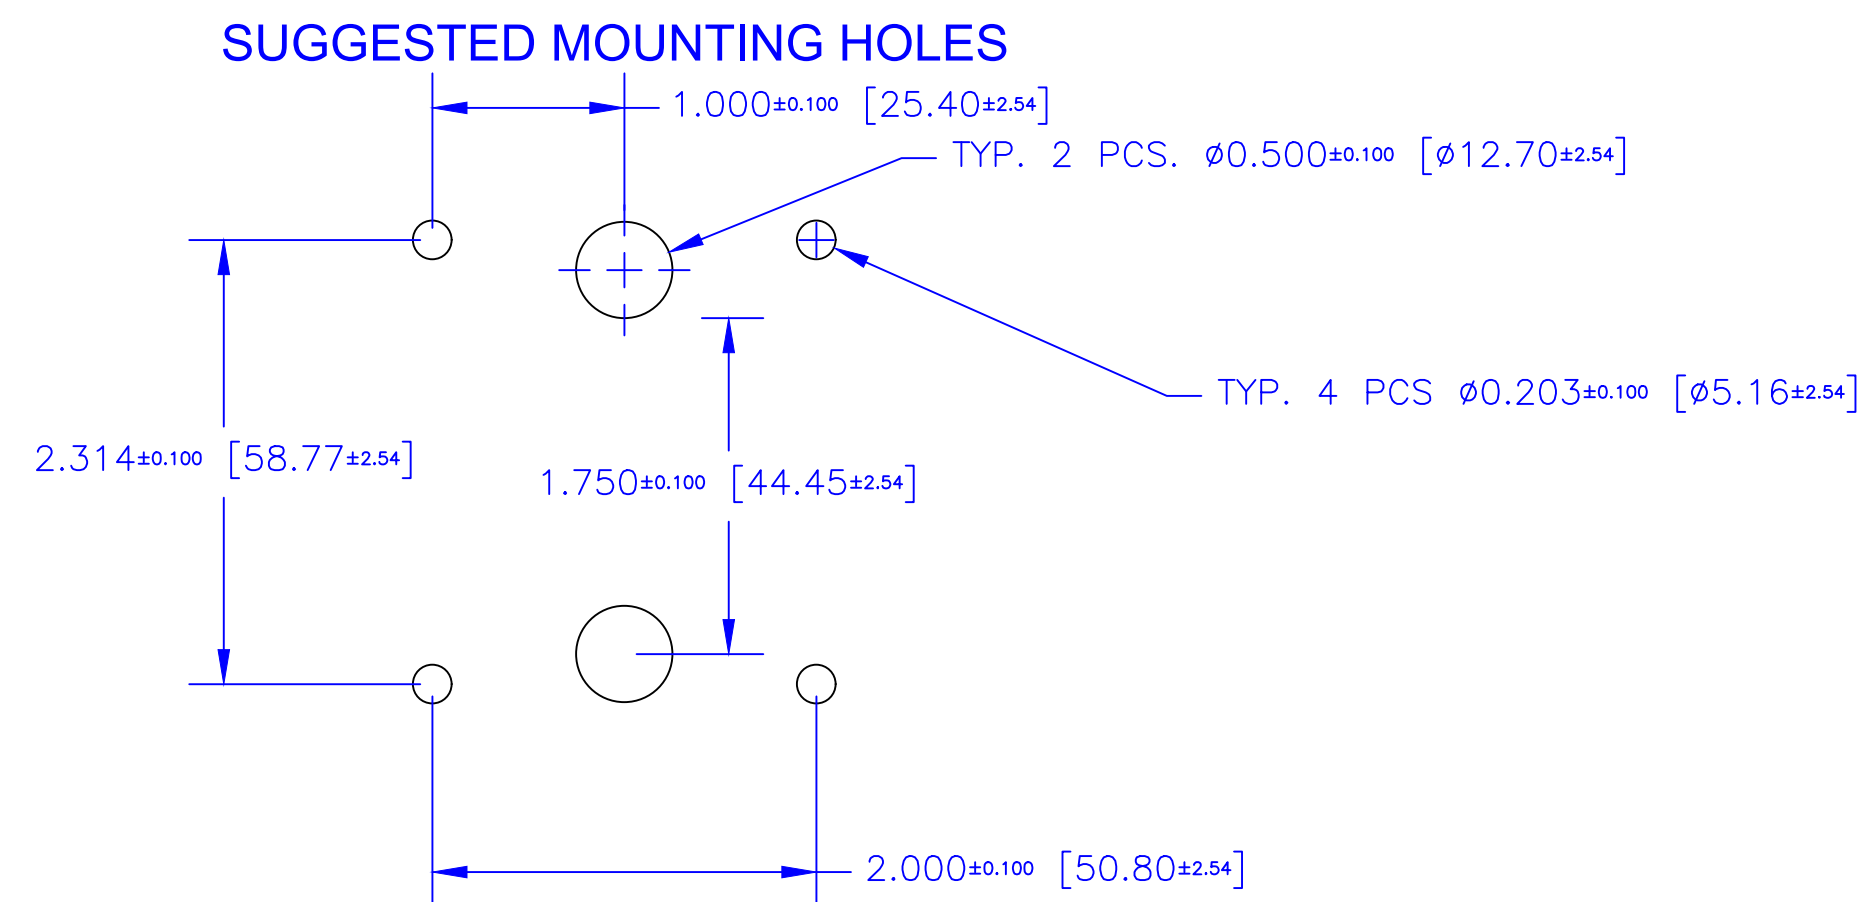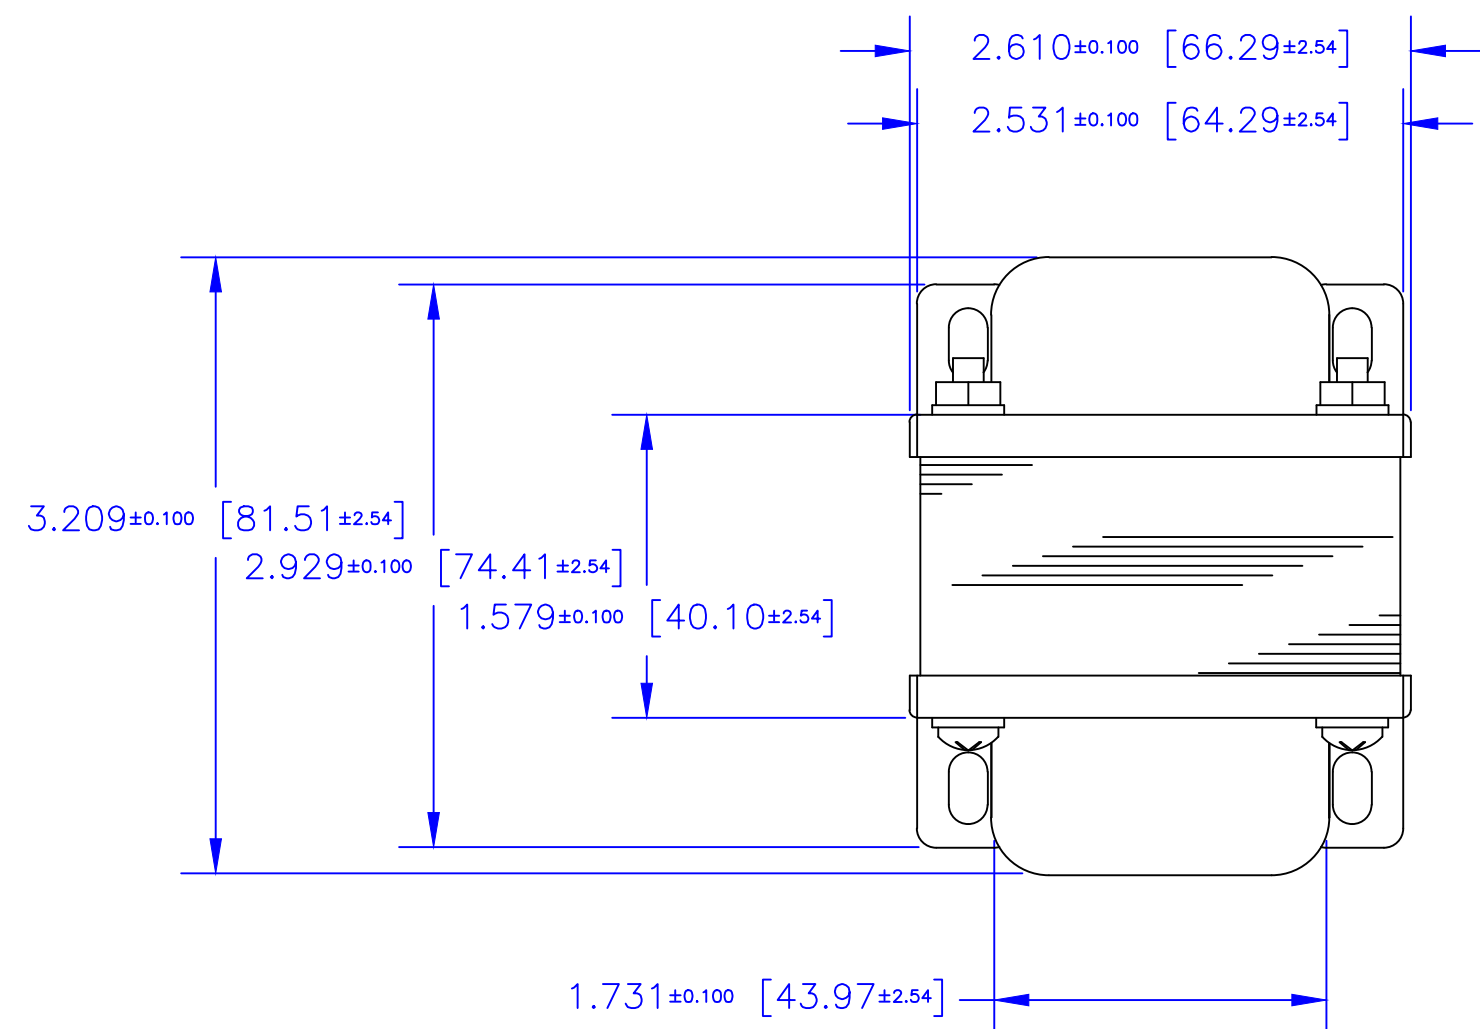

****NOTES: UNLESS OTHERWISE SPECIFIED!**

- All material is UL listed.
- All material are to be RoHS compliant.
- Bobbin: Nylon 6/6 30% glass filled, Class B, Flammability 94HB UL E184262.
- Magnet Wire: Class B, UL E32638, Gauge depending on the transformer design specifications requirement.
- Finish Tape: Polyester film tape, Class 130°, dielectric strength 5000 volts, UL E17385, guide OANZ2.
- Core Material: Depending on the transformer design specifications requirement.
- Termination: Depending on the transformer design specifications requirement.
- Mounting: Powder coated steel vtl end bells.
- Finish: Styrenated alkyd electrical varnish, air cured, UL E63933.

DRAWING BY Brian Weston		Date 4/2008		EDCOR Electronics		7130 National Parks Highway, Carlsbad, NM 88220		www.edcorusa.com	
CHECKED BY Brian Weston		Date 4/2008		E100 x 1½" vertical end bell mounted		SIZE C		FSCM NO.	
APPROVED BY Larry Weston		Date 4/2008		DWG NO. 15000-EI100-150-0X		SCALE: 1:1		©2015 EDCOR Electronics SHEET: 1 of 1	

4

3

2

1