
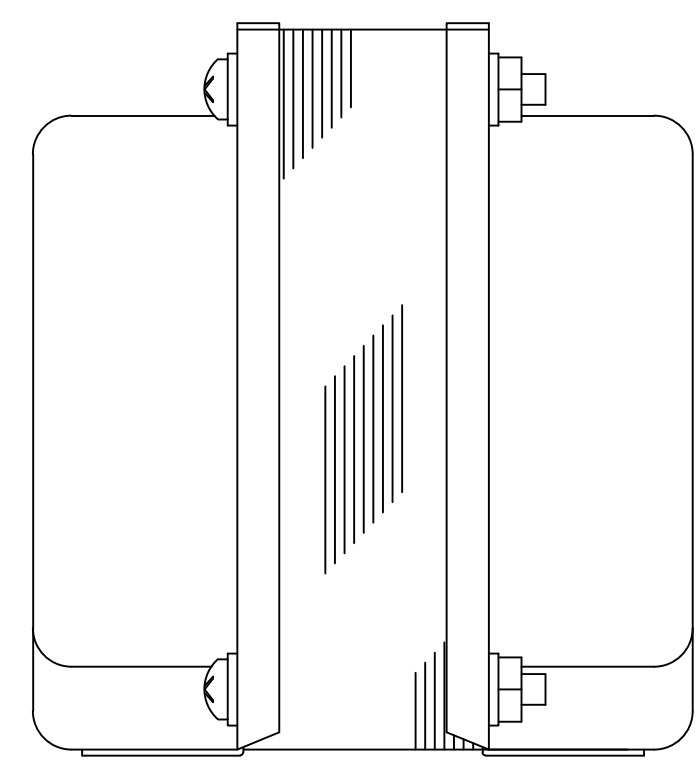
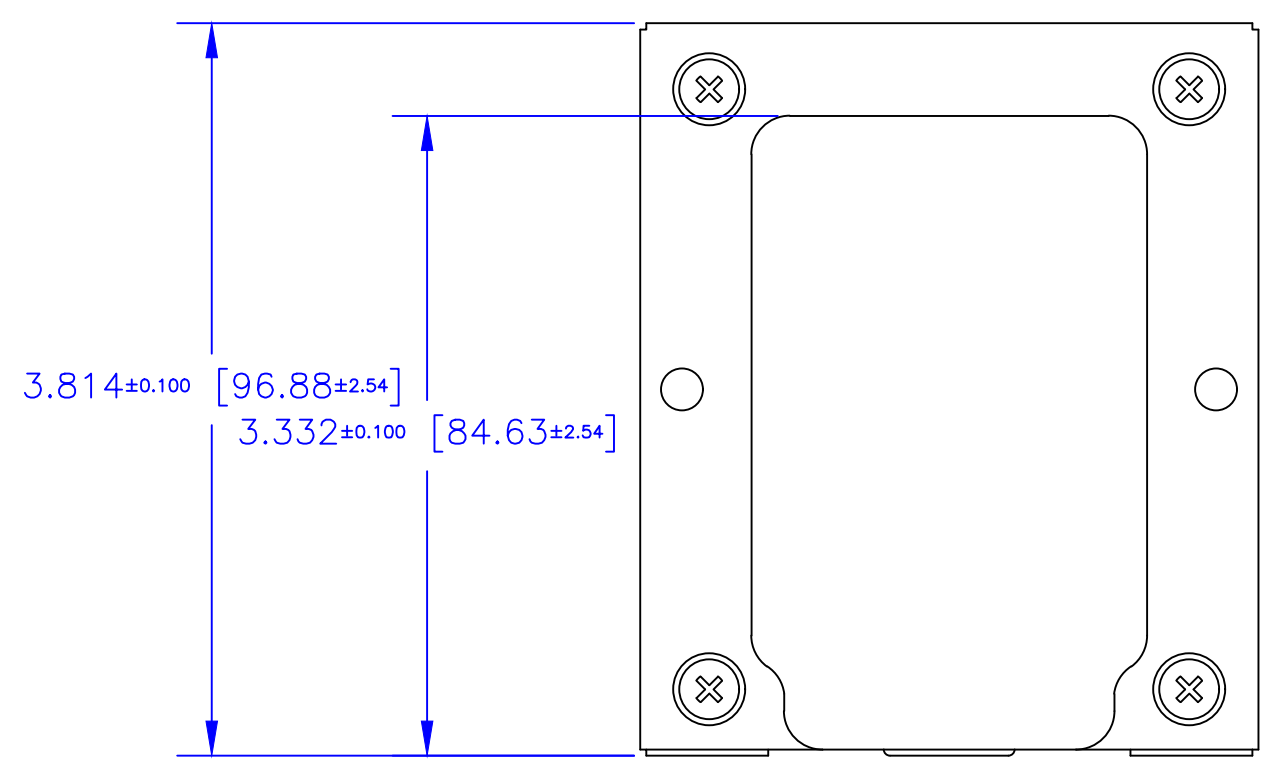
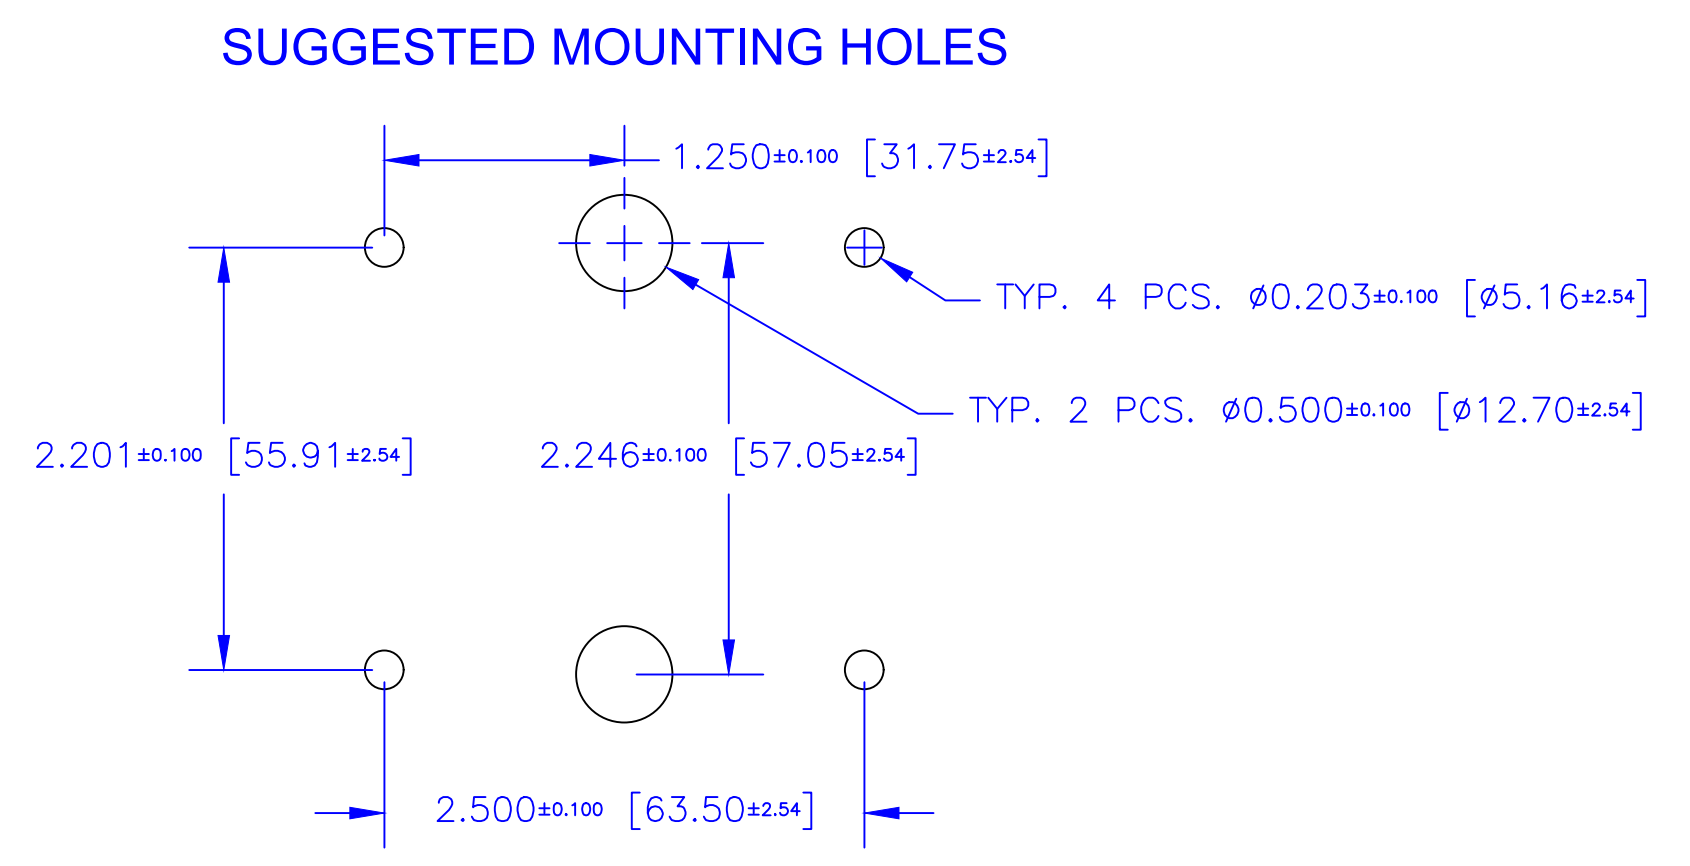


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

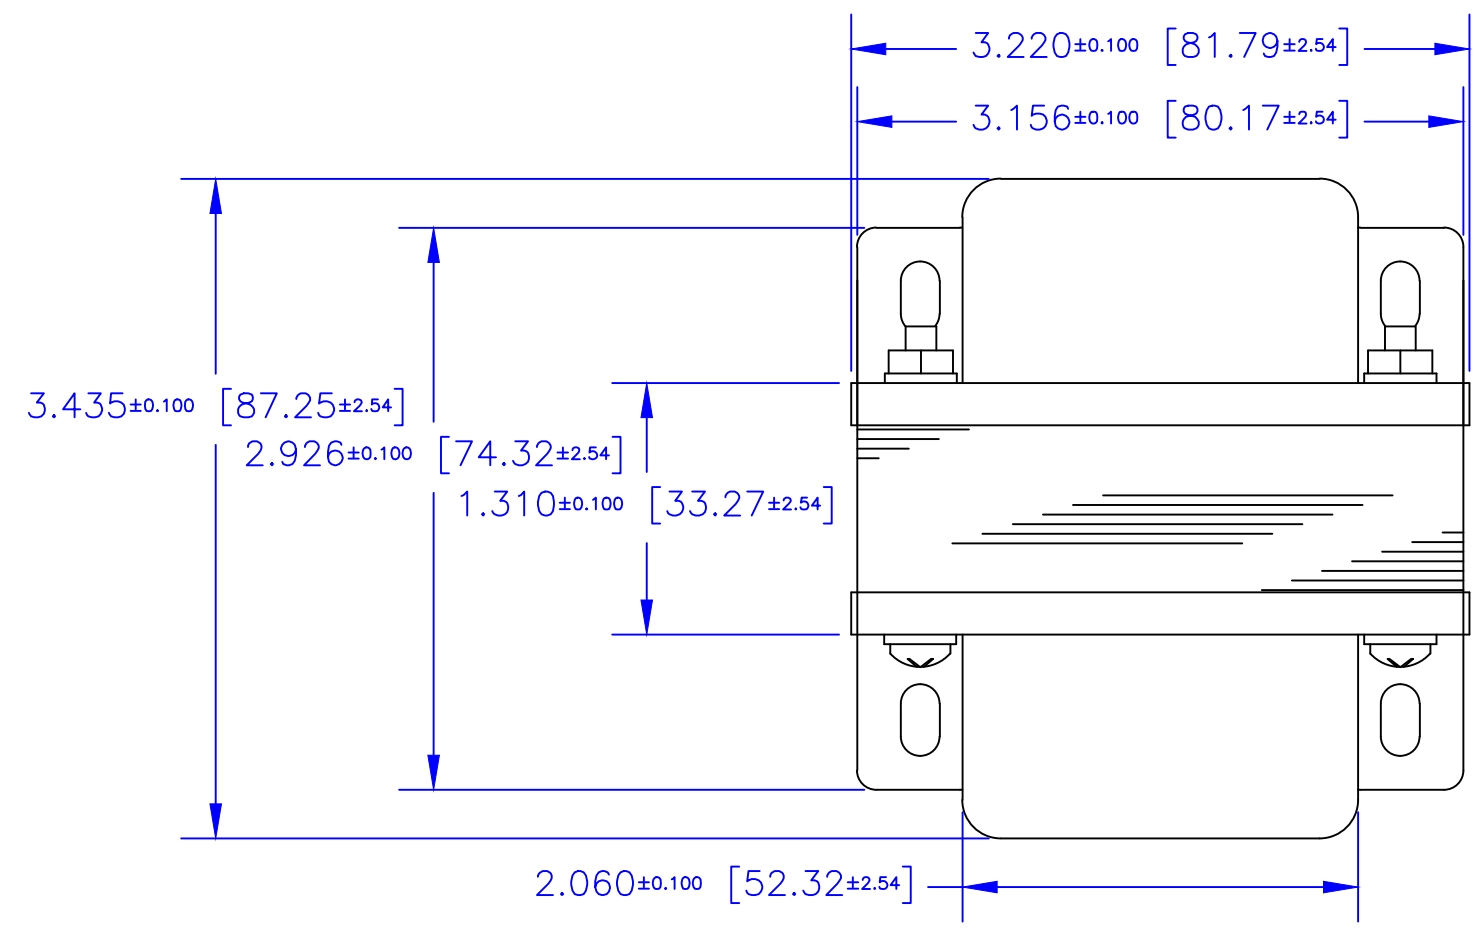

- \*\*NOTES: UNLESS OTHERWISE SPECIFIED!**
- All material is UL listed.
  - All material are to be RoHS compliant.
  - Bobbin: Nylon 6/6 30% glass filled, Class B, Flammability 94HB UL E184262.
  - Magnet Wire: Class B, UL E32638, Gauge depending on the transformer design specifications requirement.
  - Finish Tape: Polyester film tape, Class 130°, dielectric strength 5000 volts, UL E17385, guide OANZ2.
  - Core Material: Depending on the transformer design specifications requirement.
  - Termination: Depending on the transformer design specifications requirement.
  - Mounting: Powder coated steel vertical end bells.
  - Finish: Styrenated alkyd electrical varnish, air cured, UL E63933.

DRAWING BY <b>Brian Weston</b>		Date <b>8/2005</b>		<b>EDCOR Electronics</b>	
CHECKED BY <b>Brian Weston</b>		Date <b>8/2005</b>		7130 National Parks Highway, Carlsbad, NM 88220 Voice: (575) 887-6790 www.edcorusa.com	
APPROVED BY <b>Larry Weston</b>		Date <b>8/2005</b>		E1125 x 1¼" vertical end bell mounted	
SIZE <b>C</b>	FSCM NO.	DWG NO. <b>15000-EI125-125-0X</b>	REV	SCALE: 1:1	
©2015 EDCOR Electronics		SHEET: 1 of 1			